


model 52794

BASIC BT

by KBSOUND

eISSOUND KBSOUND®

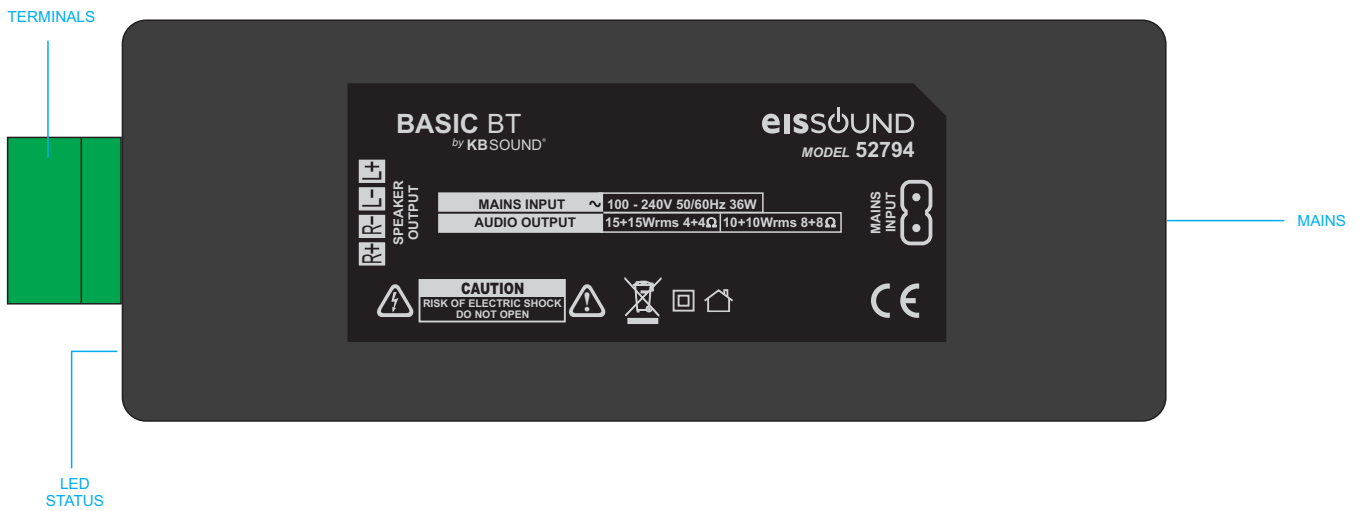

Features

- Bluetooth streaming v4.1
- Power supply = 100/240Vac 50/60Hz
- Consumption (max) = 36W
- Speaker impedance = 4/8/16 ohms

Terminals

R+/R- = Right speaker output
L+/L- = Left speaker output

LED display

| | |
|--------------------|--------------------|
| blue flashing fast | BT pairing process |
| blue ON | BT connected |

eISSOUND

Pol. Malpica G. Quejido 87-88
50016 Zaragoza (SPAIN)
Tel.: +34 976 465 550
Fax: +34 976 465 559
marketing@eissound.com
www.eissound.com

KBSOUND

245 Riverside Av. Suite 150
Jacksonville, FL 32202 (USA)
info@kbsound.com
www.kbsound.com

AENOR



Empresa Registrada

ER-0634/1998



CC-1222ENG-00
64410112



| 52794 | MIN | NORMAL | MAX | | COMMENTS |
|-----------------------|---|---------------|--------|-----|----------|
| Measurements | | 159,5x54x35,5 | | mm | |
| IP level | | IPX6 | | | |
| Voltage | 100 | | 240 | Vac | 50/60Hz |
| Consumption demand | | | 36 | W | 4 ohm |
| | | | 28 | W | 8 ohm |
| | | | 15 | W | 16 ohm |
| Output power | | | 15+15 | W | 4 ohm |
| | | | 10+10 | W | 8 ohm |
| | | | 6+6 | W | 16 ohm |
| Passband | 30 | | 18.000 | Hz | |
| Input sensitivity | | 81 | | dB | dBm0,1% |
| Distortion | | 0,05 | | % | |
| SNR | | 100 | | dB | |
| Bluetooth spec. | Class2 BT4.1 + EDR A2DP 1.2 AVRCP 1.4 | | | | |
| Wireless transceiver | | 2,4 | | GHz | ISM Band |
| RF transmission power | | 3,31 | | dBm | |
| RF antenna | | internal | | | |
| Bluetooth range | | | 10 | m | |

